

High efficiency pumps

Wilo-Stratos

As the first High Efficiency Pump in the world, the Wilo-Stratos defines energy efficiency class A for standalone circulators, thereby setting a new standard.

WILO extended this product technology towards new pump ranges especially for HVAC applications of the OEM industry.


Wilo-Stratos PARA and Wilo-Stratos TEC are the new generations of High Efficiency Pumps designed to meet the demands of OEM industry.

The scope of both pump ranges is precisely tailored to meet the individual requirements of the market and customer.

For optimal performance in the smallest space:

- > Concentrating on the essentials
- > For heating, solar, cooling and air-conditioning
- > Up to 80% energy saving*
- > Intelligent design
- > Quick and safe installation
- > Simple operation

* Compared with unregulated circulators

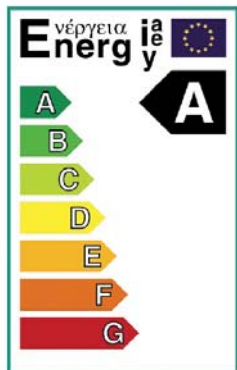

Contact information

WILO INTEC

50, av Casella
F-18700 Aubigny sur Nère
Tel: +33 2 48 81 62 62
Fax: +33 2 48 58 20 29
www.wilointec.com
information@wilointec.com

Vincent FLEURIER

Sales Manager France & Spain
Tel: +33 2 48 81 62 74
Fax: +33 2 48 58 20 29
vincent.fleurier@wilointec.com

Dario FRAZZA

Sales Manager Italy
Tel: +39 335 762 6181
Fax: +39 059 286 0855
dario.frazza@wilointec.com

Thomas MERSCHEIM

Sales Manager Germany
Tel: +49 172 352 3933
Fax: +49 231 410 2578
thomas.merscheid@wilo.com

Kevin PADMORE

Sales Manager UK
Tel: +44 776 801 8879
Fax: +44 128 373 2380
kevin.padmore@wilointec.com

Ronald RIJKHOFF

Sales Manager Benelux
Tel: +31 653 126 749
Fax: +31 889 456 199
ronald.rijkhoff@wilo.nl



WILO INTEC

Technics in motion, People in action



Circulators
OEM HVAC business


Division Circulators

Wilo-Stratos TEC High efficiency pump

WILO-Stratos TEC



Hydraulic

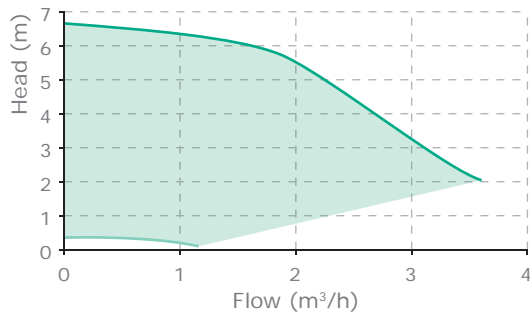

Application/Product benefits


- > For heating and solar
- > Max. pressure: 7m
- > Max. flow: 3m³/h
- > Electrical consumption 4W - 60W
- > Externally controlled by PWM
- > Maximum efficiency (depending on pump housing) up to 47%
- > Available with a range of cast iron or composite housings

Wilo-Stratos PARA High efficiency pump

WILO-Stratos PARA



Hydraulic

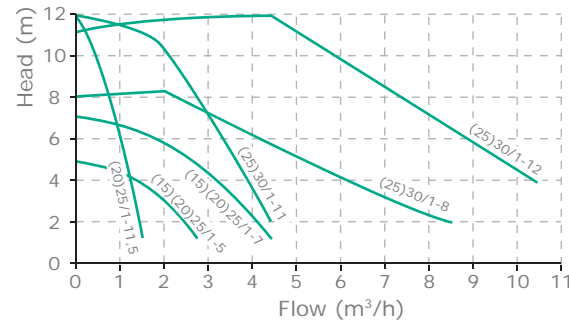

Application/Product benefits


- > For heating, air conditioning, cooling, geothermal and solar
- > Max. pressure: 12m
- > Max. flow: 10m³/h
- > Optimum front access
- > Operating modes: Dp-c, Dp-v and remote-control (speed, on/off)
- > Collective fault signal
- > Remote control 0-10V or PWM
- > Cable brake detection of remote control signal

Wilo-ST ECO, RS, RSG Optimised standard pumps

Wilo-ST ECO, RS, RSG



Hydraulic

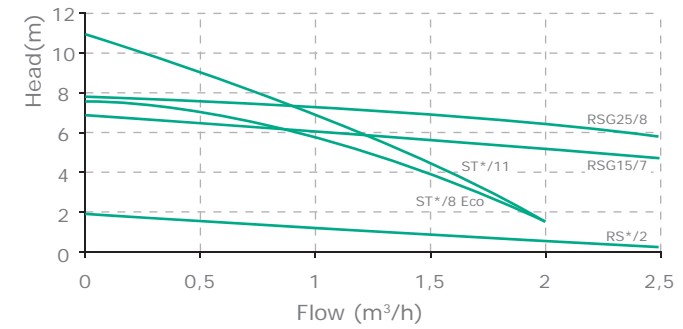

Application/Product benefits

- > Max. pressure: 11m
- > Max. flow: 4m³/h

Wilo-ST ECO

- > For solar systems
- > Energy optimised

Wilo-RS

- > For central heating systems
- > Available with a range of cast iron or composite housing

Wilo-RSG

- > For heat pumps
- > Up to 8m at 4m³/h